

Cable Installation & Site Equipment



Table of Contents

Code	Product	Page
90287	Compact 90mm Bridge Type Cable Roller	<u>4</u>
90286	Heavy Duty 130mm Ladder Rack Cable Roller	<u>4</u>
90288	Heavy Duty Triple Corner Cable Roller	<u>4</u>
90291	V Type Lead In Pipe/Cable Roller	<u>5</u>
90290	Edge Mount Manhole Lead In Cable Roller	<u>5</u>
90292	Edge Mount Manhole Lead In Cable Roller	<u>5</u>
90296	Bell Mouths	<u>6</u>
90293	Cylindrical Duct Brushes	<u>6</u>
90294	Foam Pigs	<u>6</u>
90295	Wire Brush Pig	<u>6</u>
90304	The 4.5mm Diameter Cobra Rod	<u>7</u>
CR9	The 9mm Diameter Cobra Rod	<u>7</u>
cr1	The 6.0mm Diameter Cobra Rod	<u>7</u>
90301	Horizontal Drum Dispenser	<u>8</u>
90297	Roll on Cable Drum Rotator	<u>8</u>
90302	Cable Drum Lifter	<u>8</u>
90298	Cable Drum Roller	<u>9</u>
90299	Braked Drum Stand	<u>9</u>
90300	Hydraulic Drum Jacks	<u>9</u>
16SSPFINS	Insulated Newcastle Drainer	<u>10</u>
TSSPFINS	Insulated Treaded Spade	<u>10</u>
CGSSPFINS	Insulated Clay Grafter	<u>10</u>
2TSSPFINS	Insulated Taper Mouth Spade	<u>10</u>
2RSSPFINS	Insulated Round Mouth	<u>10</u>
TRSSPFIN	Insulated GPO Trencher	<u>10</u>
POSSPAFGINS54	Insulated Post Hole /Rabbiting Spade	<u>10</u>
POSTFGINS54	Insulated Shove-Holer	<u>10</u>
2SSPFINS	Insulated Square Mouth	<u>10</u>
POSSPAFGINS54	Insulated Post Hole /Rabbiting Spade	<u>11</u>
KIDPUNSGIN	Insulated Kidney Punner	<u>11</u>
10SRFGINS	Insulated 10lb Square Rammer	<u>11</u>
DIGBARINS	Insulated GPO Digging Bar	<u>11</u>
SFSSPFINS	Insulated Fork	<u>11</u>
216332	Insulated Chisel and Point	<u>11</u>
90316	Tripod Flexible Road Works Signs	<u>12</u>
90320	Folding Plastic Road Works Signs	<u>12</u>
90319	Road Cone Signs	<u>12</u>
90321	Metal Frame Road Works Signs	<u>12</u>
701156	Red Barrier Chain	<u>13</u>
701158	Pigtail Posts	<u>13</u>
701157	Red White Barrier Tape	<u>13</u>
65200612	Watchman Barrier System	<u>14</u>
65200611	Workgate 4-Gate System	<u>14</u>
65200610	Red Barrier With Feet	<u>14</u>
90318	Pop Up Road Cones	<u>15</u>
90317	Road Cones	<u>15</u>

Cable Installation / Site Equipment

Code	Product	Page
JU	Non Conductive Jointing Umbrella	<u>15</u>
90315	Square Pop Up Tents	<u>16</u>
90314	Triangular Pop Up Tents	<u>16</u>
90327	Atlas Copco TT Breaker	<u>17</u>
90307	Breaker Steels	<u>17</u>
90324	Band IT	<u>17</u>
90323	PVC Galvanized Band	<u>17</u>
90322	Outrigger Pads	<u>18</u>
90326	Ground Mats	<u>19</u>
216326	Overhead Line Height Restriction System	<u>19</u>
90313	Show-ME Rechargeable LED Torch	<u>20</u>
90308	LED Lenser H7.2 & H7R.2	<u>21</u>
90311	LED Lenser H14.2 & H 14.2R	<u>21</u>
90312	Led Lenser X21.2 & X21.R2	<u>21</u>
nseco	Nightsearcher Ecostar	<u>21</u>
RWL10	Rechargeable Work Light	<u>22</u>
K9	LED K9 Worklight	<u>22</u>



Compact 90mm Bridge Type Cable Roller

The SLR2 is a compact cable roller for use in narrow trenches and/or in confined areas.

- Heavy Duty Tubular Frame Straight Line Bridge Roller
 - Fitted with hoops to fit over previously laid cables
 - 76mm Diameter Aluminium Roller
 - Oil impregnated maintenance free bushes fitted
 - Bright Zinc Plated Finish
 - 90mm diameter Cable Capacity
- Size 27.5cms Long x 15cms Wide x 18cms High*
- Weight 2.5 Kg

Heavy Duty 130mm Ladder Rack Cable Roller

The SLR11 is an heavy duty cable roller for use in most cable laying applications including ladder rack installations,

Heavy Duty Tubular Frame Straight Line Roller

110mm Diameter Large Waisted Steel Roller

Sealed roller bearing fitted

Bright Zinc Plated Finish

130mm diameter Cable Capacity

Size 40cms Long x 22.5cms Wide x 22.5cms High

Cross flats set at 300mm to suit ladder rack rungs

Weight 4.00 Kg



Heavy Duty Triple Corner Cable Roller

The BR3 is an heavy duty Triple Corner Cable Roller

These can be used singularly or linked together using Link Pins to form a full bend.

All the Bend Roller range have the same link points to facilitate various bend/roller configurations

- Heavy duty corner roller from tubular sections
- 3off 110mm Diameter Large Waisted Steel Rollers*
 - Sealed roller bearing fitted
 - Zinc Plated Finish
- Universal link pin mount positions
- Size 36cms Long x 30cms Wide x 32cms High



V Type Lead In Pipe/Cable Roller

The V style cable roller leads the cable from the drum into the trench,

This roller also doubles up as a pipe roller and can be positioned in the trench itself



- Heavy steel section construction
- Can be used as a Pipe Roller or Cable Roller 60mm Diameter steel Rollers
- Sealed roller bearings fitted
- Incorporates spring loaded shafts for easy replacement
- Zinc plated Finish

Three Sizes Available

- Size 50cms Long x 40cms Wide x 25cms High (Small)
- Size 85cms Long x 60cms Wide x 44cms High (Medium)
- Size 105cms Long x 60cms Wide x 44cms High (Large)

Edge Mount Manhole Lead In Cable Roller

The MR4 manhole cable roller leads the cable from the drum into the jointbox/manhole or the winch bond out of the manhole.

The cable roller is suitable for cables of upto 130mm

- Heavy duty tubular steel construction
- 3off 110mm Diameter Steel Roller*
- Sealed precision roller bearings fitted
 - Zinc plated
- Size 57cms Long x 21cms Wide x 40cms High
- Weight 10 Kg



Edge Mount Manhole Lead In Cable Roller

The MR1 manhole cable roller leads the cable from the drum into the jointbox/manhole or the winch bond out of the manhole.

The roller has 2 hooks for location on the manhole edge.

- Heavy steel section construction
- 76mm Diameter Aluminium Roller*
- Oil impregnated maintenance free bushes fitted
- Sealed precision roller bearings fitted
- Zinc plated or Powder Coated Finish
- Base Size 23cms Long x 13cms Wide
 - Weight 3 Kg



Bell Mouths

Steel Hinged Bellmouths are inserted into ducts and secured in position with an expansion bolt.

Standard sizes are below, all sizes are available with a guild roller fitted, simply add an "R" after the code ie SB1R

SB1 55-63mm ,SB2 76-82mm ,SB3 89-95mm
SB4 97-104mm ,SB5 115-124mm SB6 146-155mm
SB7 170-185mm ,SB8 198-220mm




Cylindrical Duct Brushes

Cylindrical Duct Brushes are fitted with steel rotating fixing eyes each end.

Standard sizes are :-

CDB1- 57mm
CDB2- 80mm
CDB3- 86mm
CDB4- 95mm
CDB5-108mm
CDB6-150mm
CDB7-200mm

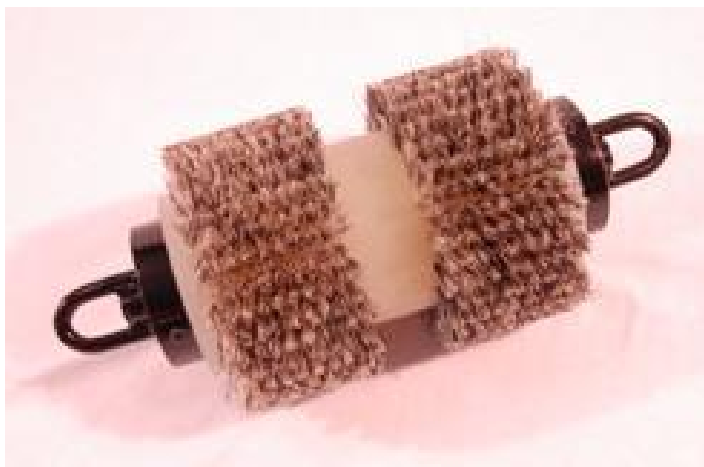

Foam Pigs

Foam Pigs are used to clear dirt and excess water from pipes.

Available in sizes from 2" - 18" in diameter, these can be supplied with plastic drive plates or with wire tow ropes



Wire Brush Pig

Designed to remove corrosion and loose debris from Steel Pipes.

WPB1 - 80mm (3")
WPB2 - 100mm (4")
WPB3 - 125mm (5")
WPB4 - 150mm (6")
WPB5 - 200mm (8")
WPB6 - 250mm (10")





The 4.5mm Diameter Cobra Rod comes on a free standing frame (size L-400mm W-200mm H-480mm) and is supplied c/w brass guide .

Part No	Size	Length
CR4.5-40	4.5mm	40m
CR4.5-60	4.5mm	60m
CR4.5-80	4.5mm	80m
CR4.5-100	4.5mm	100m

The 6.0mm Diameter Cobra Rod

The 6.0mm Diameter Conduit Snake comes on a free standing frame (size L-550mm W-220mm H- 650mm) and is supplied c/w brass guide tip.

Part No	Size	Length
CR6-60	6.0mm	60m
CR6-80	6.0mm	80m
CR6-100	6.0mm	100m
CR6.120	6.0mm	120m
CR6-150	6.0mm	150m



The 9mm Diameter Cobra Rod

The 9mm Diameter Cobra Rod comes on a free standing frame size L-780mm W-450mm (over tyres) H- 830mm) and is supplied c/w brass guide .

Part No	Size	Length
CR9-60	9mm	60m
CR9-80	9mm	80m
CR9-100	9mm	100m
CR9-120	9mm	120m



Horizontal Drum Dispenser

The DD1 Horizontal Drum Dispenser is a very versatile product for paying out cable.

The unit was primarily designed to enable cable to be dispensed directly from contractors vans, lorry backs or rail carriages but can also be used to payout cable directly from the floor

- Heavy Duty Structure
- Extremely compact and light weight
- Can be carried with one hand
- 14 Kg weight
- Bright Zinc Plated Finish

Roll on Cable Drum Rotator

DR1 light weight Cable Drum Rotator is suitable for a range of Drum diameters up to 800mm. Drums are simply rolled up the ramp onto the adjustable rollers to allow it to spin freely. The drum roller is now suitable for drums of upto 620mm wide and has 4 lateral roller guides) to help prevent twisting of the drum.

- Capacity 200Kg
- Max drum size 800mm
- Min Drum Size 300mm
- Drum Width 620mm
- Base Size 62cms Long x 65cms Wide
- Weight 14 Kgs



Cable Drum Lifter

The DL5 cable drum lug with locking lever has been designed for the lifting, loading or transportation of steel or wooden cable reel drums.

The simple design allows the user to place the lugs either side of the drum, attach a two legged chain sling (not supplied) and lift.



Cable Drum Roller

The DR3 Heavy Duty Cable Drum Rotator is suitable for a range of Drum diameters upto 2200mm.
Drums are simply rolled up the ramp onto the adjustable rollers to allow it to spin freely

- Pressed/rolled steel construction
- 76mm Diameter heavy duty zinc plated rollers
- Precision sealed roller bearings fitted
 - Capacity 1500Kg
 - Max drum size 2200mm
 - Min Drum Size 300mm
 - Drum Width is infinite
- Zinc plated/painted finish

Braked Drum Stand

Unit provides facility to lift and dispense cable drums of up to 1500kg and 1650mm diameter x 1000 wide.

The stand is fitted with a disc brake for providing cable tension.

When not in use, the Braked Drum Stand knocks down for ease.



Hydraulic Drum Jacks

The hydraulic drum jack range is ideal for use in cable yards and on site alike,
with a large drum range, the jacks are very flexible and raising of the drum is effortless.



Part No	Capacit	Base Size	Min dia	Max Dia	Weight Each
HDJ3	3000kg	700mm x 450mm	725mm	2500mm	60Kg
HDJ65	6500kg	900mm x 450mm	750mm	3000mm	90gKg
HDJ10	10000kg	900mm x 450mm	800mm	3500mm	120Kg

ShockSafe BS8020:2012 Insulated



Insulated Newcastle Drainer



Insulated Clay Grafter



Insulated Treaded Spade



Insulated GPO Trencher



Insulated Round Mouth



Insulated Taper Mouth Spade



Insulated Square Mouth



**Insulated Post Hole
/Rabbiting Spade**



Insulated Shove-Holer



**Insulated Post Hole
/Rabbiting Spade**



Insulated Kidney Punner



**Insulated 10lb Square
Rammer**



Insulated Fork



Insulated GPO Digging Bar



Insulated Chisel and Point

**We can supply a full range of digging tools with fibreglass,
hardwood or steel shafts**



Tripod Flexible Road Works Signs

- Folding three-legged sign stand
- Accepts various sizes of sign panels including 600mm & 750mm Chapter 8 Triangle



Folding Plastic Road Works Signs

Manufactured from 100% recycled polypropylene. With a robust and durable folding frame, the 750mm The self adhesive sign faces are manufactured to Chapter 8 regulations



Road Cone Signs

- Rectangular fits over the top of 75cm road Cone.
- Strap Signs are lightweight, easy to install sign system ideal for use in any temporary Traffic situation



Metal Frame Road Works Signs

Metal Temporary Road Signs, Stanchions & Frames

Exclusion Zone Materials



Red Barrier Chain

Designed for use with posts or cones to form a multi-functional barrier system.
Can be fitted to matching coloured posts with base.

Pigtail Posts

Pigtail Posts for Exclusion Zones.


All plastic pigtail posts. 99cm (39")



Red White Barrier Tape

Heavy Duty
Barrier Tape Red & White 75mm X 500m



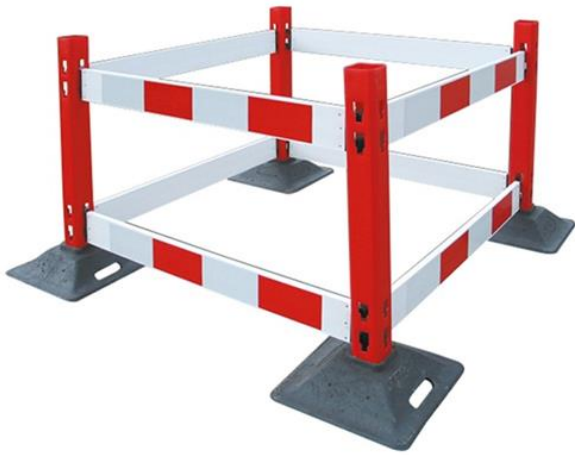

Watchman Barrier System

The most complete Chapter 8 barrier available to the industry.

Manufactured in High Impact HDPE plastic that provides a strong and durable upright post and barrier system.

Recycled heavy duty bases are stackable and can be embossed.

System comes complete with 4 posts, 4 boards and 4 bases.

Additional boards, bases or posts can be purchased separately

Workgate 4-Gate System

Robust mini barrier designed with contractors in mind.

Each gate has a Chapter 8 reflective top panel, linked together with black clip-on hinges.

Easily folds for quick deployment and lightweight for storage and handling.



Red Barrier With Feet

Easy to use, assemble and store. Available in 2m or 1.5m lengths.

The Titan has undergone extensive testing: Sub-zero impact testing;

Accelerated UV age testing.

Height including feet 1.2m approx





Pop Up Road Cones

Available in 410mm or 600mm

Packs flat for easy storage. Extends to workable height in seconds. High-visibility with reflective band.

Road Cones

450mm and 750mm Standard Cones



Non Conductive Jointing Umbrella

Standard Specification:

- PVC Reinforced cover material 500gms (PVC coated Both sides) 100% waterproof
- Flame Retardant (BS7837:1996)
- Translucent
- Fully Non-conductive - No metal parts
- Fibreglass Telescopic handle (1.6 m to 2.7m)

Curtain option - Zipped Umbrella Curtain to produce Umbrella Tent

- Curtain surround - 4oz Flame Retardant BS7837:1996) Polyester/nylon
- Fit both 6ft or 8ft Umbrella

6ft & 8ft Available

Square Pop Up Tents

Standard Specifications:

- 350gms Translucent PVC reinforced Flame Retardant BS7837:1996 allows natural light in
- Seams 100% waterproof
- Robust Die cast central joints
- Centre joint rubber protection (INTEGRATED) Non Conductivity & Finger protection
- Fibreglass framework
- Rubber protection feet for longer product life
- 3off Guy lines & Tent pegs
- All spare parts available
- No Loose components – integrated frame & Cover

Part No	Dimensions
100 5ST	1.0 x 1.0 x 1.6 m
125 5ST	1.25 x 1.25 x 2.0 m
150 5 ST	1.5 x 1.5 x 2.0 m
125/180 5ST	1.25 x 1.8 x 1.25 m
180 5ST	1.8 x 1.8 x 2.0 m
210 5 ST	2.0 x 2.0 x 2.1 m
250 5 ST	2.5 x 2.5 x 2.0 m
270 5 ST	2.7 x 2.7 x 2.0 m
300 5 ST	3.0 x 3.0 x 2.0 m
360 5 ST	3.6 x 3.6 x 2.2 m



Triangular Pop Up Tents

- Heavy-duty PU coated Flame Retardant BS7837:1996
- Polyester/Nylon 7oz - PU coated inside for easy cleaning
- Material thickness approx. twice of market standard)
- No Loose components (Erect in seconds)
- Non Conductive
- Die cast centre joints
- Fibreglass framework
- 2off Guy lines + Tent pegs
- Full height Front & Rear central Zipped entrances
- Company Logos upon requests are available



Part No	Dimensions
150PT	1.5 x 1.5 x 1.45m (Single Zip)
180PZ	1.8 x 1.8 x 1.7m (Double Zip)
180PZWT	1.8 x 2.5 x 1.5m (Double Zip)



Atlas Copco TT Breaker

Atlas Copco's petrol driven breakers cover a wide range of applications like breaking concrete, cutting asphalt, tamping ballast and more.

All without the need for power packs or cables. Cobra TT has been specially designed for tie tamping.

It works at a relatively high frequency and the impact energy has been optimized to prevent pulverization of ballast.

Breaker Steels

Full Range of Steels to Fit Standard Breakers



Band IT

Banding System for Signs Etc Stainless Steel and Coated





Outrigger Pads

All pads feature weather and abrasion resistant labels noting your company name, SWL, weight, size, unique ID No. and source / date of production.

Unique Industry leading Safety Grip finish to reduce slippage issue of smaller new pads... standard on upper face of pads up to 600mm in size...available as an option on larger sizes

Unbreakable even under extreme loading...guaranteed

Water resistant; no weight gain due to water uptake or increased risk of frost induced failure Improved performance and longevity compared to timber

Easy manual handling of larger pad areas using easy to roll round pads and modular Sleepers Integral graded rope handles. Graded chains fitted to largest pads

Easy to clean by pressure washing, no risk to saturate / degrade pads UniMats™ HDPE range guarantees electric isolation

Excellent chemical resistance, Can be used in extreme weather conditions (-100°c to +80°c)

Stabilizer / outrigger foot location rebates / slots available to ensure central loading of pad

Size	Load Capacity	Weight	Load Spread Area
300 x 300 x 30mm	4 tonnes	2.6 kg	0.09 m ²
300 x 300 x 40mm	5 tonnes	3.4 kg	0.09 m ²
400 x 400 x 40mm	10 tonnes	6.1 kg	0.16 m ²
400 x 400 x 50mm	12 tonnes	7.6 kg	0.16 m ²
400 x 400 x 60mm	15 tonnes	9.1 kg	0.16 m ²

Ground Mats

HDPE Access Mats provide optimal protection and safety for work on vulnerable or unstable ground. They permit temporary access for vehicles and machines and our unique Safety Grip / Chevron Cut treatment ensures optimum grip during site operations.



Overhead Line Height Restriction System



- HSE GS6 Compliant
- Collapsed Pole Length: 171.4
- Extended Pole Length: 6 Metres
- Base Section OD: 42mm
- No of Sections (per Pole): 6
- Pole Weight: 5kg
- Safe non-electrically conductive material of construction
- All Clamps are hand controlled and adjustable without extra tooling



Inner 5W LED
for Spot Beam

Outer ring of
20 LEDs for
Wide-Angle Flood



Quick-Release
Charging
Base

Adjustable Multi-Position Base



Show-ME Rechargeable LED Torch

Made in the USA

- Non Conductive
- Dual function LED Rechargeable Light lets you switch from intense spot light to wide-angle flood light with the flip of a switch.
- One 5W LED projects a narrow 3° spot beam for up to 7 hours per charge.
- Twenty high-performance LEDs produce a wide-angle flood light for up to 48 hours per charge.
- 100,000 hour bulb life ensures long-lasting light and reliable performance
- 900 Lumens.
- Five year warranty on LEDs.

Rack Mounted Vehicle Charger ensures torch is always charged
Protected by charge regulator
Non memory type battery



LED Lenser H7.2 & H7R.2

Operating Modes: Boost: 250 lumens / Power: 200 lumens / Low: 20 lumens / Signal / Dimming control
Beam Range: Boost: 160 m / Power: 140 m / Low: 50 m
Run Time: Boost: 7 hours / Power: 12 hours / Low: 60 hours
Maximum Luminous Flux: 250 lumens
Focus: Advanced focus system
Optics: Speed focus; spot to flood
Rechargeable and Non Rechargeable



LED Lenser H14.2 & H 14.2R

Operating Modes: Boost: 850 lumens / Power: 350 lumens / Low: 60 lumens
Beam Range: Boost: 300 m / Power: 200 m / Low: 70 m
Run Time: Boost: 6 hours / Power: 10 hours / Low: 40 hours
Maximum Luminous Flux: 850 lumens
Batteries Required: Lithium-ion rechargeable battery pack, 7.4 V, 2200 mAh (included)
Run Time: Up to 40 hours
Weight: 340 grams
Rechargeable & Non Rechargeable Head Torch



Led Lenser X21.2 & X21.R2

LED LENSER's upgraded X21.2 has an impressive run time of up to 100 hours, 1600 lumens for over 600 meters.
LED LENSER's Advanced Focus System™ and X-Lens Technology™,
A low battery message system which lets the user know when the light is nearing the end of run time,
Rechargeable and Non Rechargeable Versions



Nightsearcher Ecostar

The ECOSTAR110V linkable is the lighting solution for the industrial and construction market and outdoor events. Fitted with CEE 110V plug and socket allowing multiple lights to be linked together available in 30w, 50w, and 100w.
Linkable versions enable convenient 'daisy chaining' and the LED energy efficiency allows very long cable runs.

Rechargeable Work Light

- Cordless rechargeable LED flood light
- Mains and car charger included
- Working time: 3 hours
- Charging Time: 5 hours
- Overcharge and discharge protection
- UK plug version
- Lamp Included
- Energy Saving
- Power Factor: 0.5
- Lux at 1m: 250lux
- CRI at L₁₀₀: 75
- Efficacy (lm/cctW): 55
- Dimension: Depth: 185mm

10 w and 20 w versions



LED K9 Worklight

Worklight and Floodlight in one!

The K9 30 LED is a versatile and portable LED torch / worklight system designed for patrol, inspection and emergency work situations.

This product design represents the latest technology in LED portable lighting it is designed to be virtually maintenance free and robust enough to deal with the rigours of a harsh work environment.

